


SUSPENDED COVER



SmartSeam® is an engineered temporary ceiling barrier used to separate overhead construction from active interior environments. The suspended cover system provides continuous containment beneath roof work and other elevated construction, helping facilities maintain operations while work proceeds above.

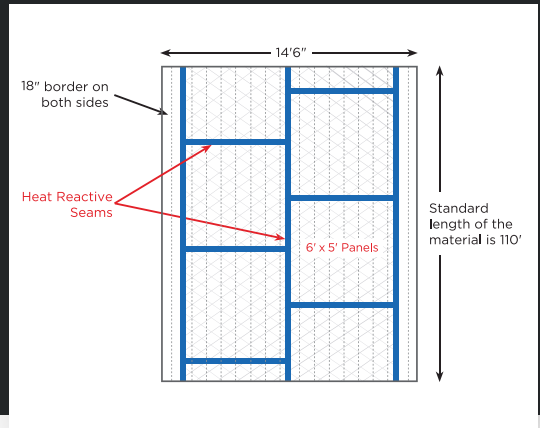

FULLY CODE-COMPLIANT



ASTM D8662
ASTM E84 CLASS A
FM 4652 APPROVED
IBC COMPLIANT
NFPA 13 COMPLIANT
UL 723S CERTIFICATION

IDEAL FOR:

Reroofing, Roof Deck Replacement,
Overhead Construction, Active Manufacturing,
Food & Beverage, Warehousing

PROPERTIES

SPECIFICATIONS

Material Construction	4-ply scrim-reinforced film with flame-retardant, antimicrobial, and antistatic additives
Nominal Thickness	6 mil
Ply Count	4-Ply
Load Capacity	10 lbs. / 100 sq. ft
Maximum Use Temperature	150°F
Minimum Use Temperature	-70°F
Interior or Exterior Use	Interior
UV Resistant	No
Attachment Points	Roof deck, walls, bar joists, any structure
FDA Regulated	Yes

FEATURES



CONTROLS FLAME SPREAD

Fire-retardant additives support safer temporary containment.



ANTI-STATIC PROTECTION

Prevents static and dust hazards across electronics, textiles, printing, & chemicals.



INNOVATIVE SCRIM DESIGN

Cross-scrim layers maximize strength, tear resistance, & high-pressure durability.



PROTECTIVE DUST CAP

Seam dust caps shield people, products, & equipment from fine particles.



100% CODE COMPLIANT

Certified compliant across major codes (IBC, FM, NFPA) & uniquely approved below sprinklers.



800.995.4556
TUFFWRAP.COM



AEROSPACE | FOOD & BEVERAGE | INDUSTRIAL & COMMERCIAL | MANUFACTURING | PHARMACEUTICAL | RETAIL | WAREHOUSE & DISTRIBUTION