


DEBRIS NETTING

TUFFNET

Discover TUFFNET, NFPA 13 code-compliant debris Netting designed for suspended cover systems. **The smart choice for protecting people, products and property from falling dust and debris.**

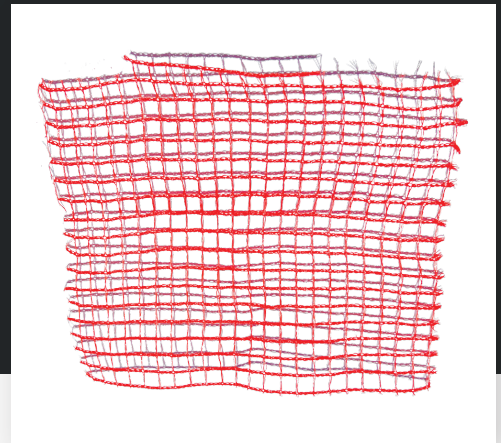

NFPA 13 OPEN GRID CRITERIA

NFPA 13 states that any permanent open grid ceilings installed beneath sprinkler systems must have openings that are at least 1/4 inch in the least dimension. The thickness or depth of the material must not exceed the least dimension of the opening, and the openings constitute at least 70% of the ceiling area. The grid design must not restrict the sideways travel of sprinkler discharge nor change the character of discharge.



TUFFNET Debris Netting features a 1/4 inch knitted mesh, making it **NFPA 13 compliant.**

PROPERTIES	SPECIFICATIONS
Material Construction	High-density polyethylene and added UV anticatalyst
Nominal Thickness	50 mil
Appearance	Orange
Load Capacity	10 lbs. / 100 sq. ft
Maximum Use Temperature	150°F
Minimum Use Temperature	-70°F

FEATURES



CONTAINS A FIRE-RETARDANT ADDITIVE

Helps reduce flame spread and supports safer temporary containment.



TEAR/RIP RESISTANT

UV-treated netting will not unravel when cut and remains flexible in all-weather conditions.



SUPPORTS SPRINKLER WATER FLOW

The 1/4-inch netting design allows water to pass through during sprinkler activation and supports proper spray distribution.



GRID COMPLIANT

The 1/4-inch knitted mesh is designed to meet NFPA 13 open grid criteria.



800.995.4556
TUFFWRAP.COM



AEROSPACE | FOOD & BEVERAGE | INDUSTRIAL & COMMERCIAL | MANUFACTURING | PHARMACEUTICAL | RETAIL | WAREHOUSE & DISTRIBUTION