



100% IBC CODE COMPLIANT & FM APPROVED SUSPENDED COVER



**CODE COMPLIANT**  
Meets IBC EC 043-2020 six areas of code compliance, FDA, GMP, UL 723S, NFPA 13, ASTM E84 Class A, and is FM-4652 Approved.

**ANTISTATIC**  
Mitigates electrostatic discharges (ESD) to protect against combustible dust.

**FLAME RESISTANT**  
Approved for installation below sprinkler systems; Reduces flame and smoke spread.


**ANTIMICROBIAL**  
Protects against mold, mildew, and bacterial growth.

**HEAT-REACTIVE SEAM**  
6' x 5' panels open quickly to allow sprinklers to activate in case of fire.

**STRONG 4-PLY MATERIAL**  
Six mil thick, four-layer polyethylene material provides highest puncture resistance and tear strength.

**PROTECTIVE DUST CAP**  
Protective dust cap over the heat reactive seam provides extra dust and debris protection.

**INNOVATIVE SCRIM DESIGN**  
Diagonal and perpendicular scrim orientation resists tearing.

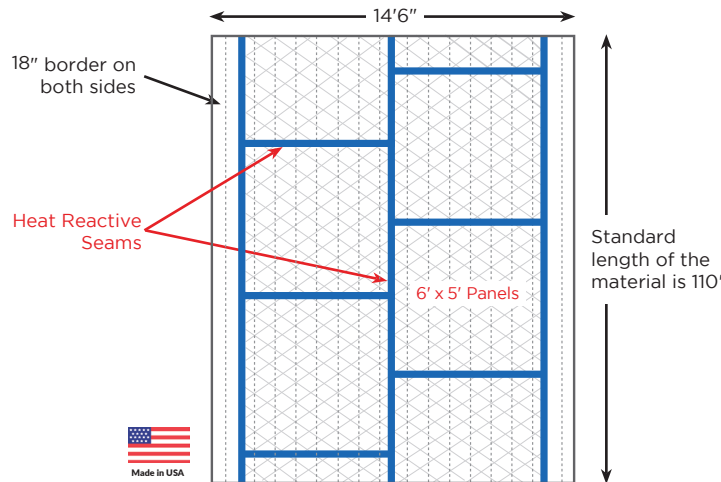

100% IBC CODE COMPLIANT & FM APPROVED SUSPENDED COVER



**CODE COMPLIANT**  
Meets IBC EC 043-2020 six areas of code compliance, FDA, GMP, UL 723S, NFPA 13, ASTM E84 Class A, and is FM-4652 Approved.

**ANTISTATIC**  
Mitigates electrostatic discharges (ESD) to protect against combustible dust.

**FLAME RESISTANT**  
Approved for installation below sprinkler systems; Reduces flame and smoke spread.

**ANTIMICROBIAL**  
Protects against mold, mildew, and bacterial growth.

**HEAT-REACTIVE SEAM**  
6' x 5' panels open quickly to allow sprinklers to activate in case of fire.

**STRONG 4-PLY MATERIAL**  
Six mil thick, four-layer polyethylene material provides highest puncture resistance and tear strength.

**PROTECTIVE DUST CAP**  
Protective dust cap over the heat reactive seam provides extra dust and debris protection.

**INNOVATIVE SCRIM DESIGN**  
Diagonal and perpendicular scrim orientation resists tearing.

